

TECHNICAL DATA

F2 100

WALL PROTECTION CLADDING STRIP

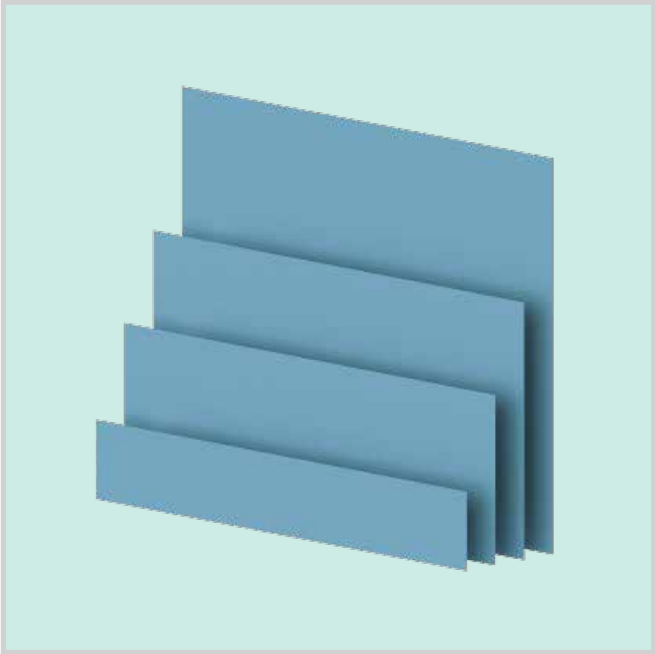

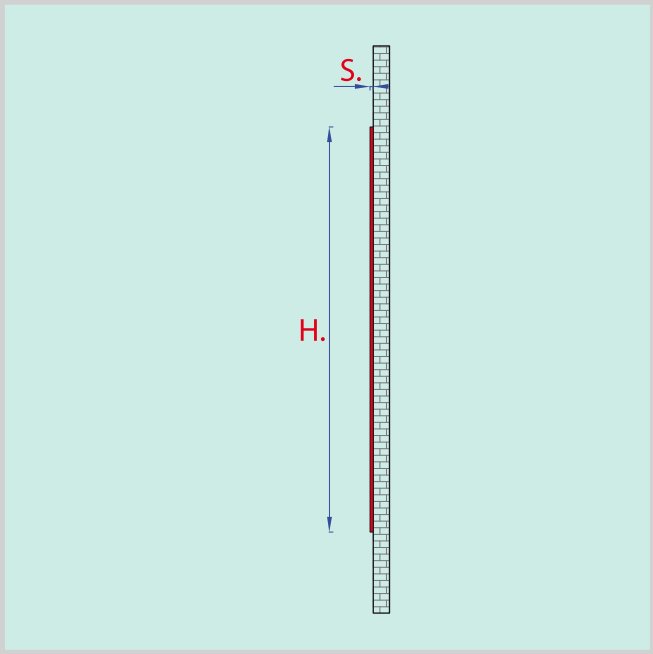

DESCRIPTION

Wall protection cladding strip, 97 mm high,
Made of **Titanium Dioxide** polymers, 2 mm thick.
"FINE" embossing for optimal hygiene.
Fire-retardant, anti-pollutant, antibacterial and odourless.
High resistance to impact, weathering and chemical agents.
To be fixed to the wall using suitable adhesives.

LOAD

Shock-resistance 300 kg.

SIZE

H. 97 mm . S. 1,5/2 mm. - strip of 3 lm - in multiples of 39 lm.

COLOR

S0 White - S1 Ivory- S2 Pastel blue - S3 Pastel green- S4 Light grey - S6 Yellow - S7 Blue - S8 Moss green - S9 Silver grey - S10 Brown - S12 Red - S14 Salmon - S16 Dove - S20 Apricot

CERTIFICATIONS

Certification of reaction to fire class B-s1,d0.
Certification certifying the absence of bacterial growth issued by CSI IMQ Group.
"Indoor Air Comfort GOLD" certification guaranteeing very low VOC emissions.
ISO 9001:2015 Quality Certification issued by TÜV Italia S.r.l.
Declaration from the Quality Office, certifying the non-use of Cadmium and/or heavy metals.
Declaration from the Quality Office, certifying biocompatibility and recyclability.


MPS reserves the right to modify products without previous advice


MPS Professional Protection Systems S.r.l.
Via Berlino, 17
24040 Verdellino (BG)
Italy
T.: +039 035 871895
F.: +039 035 870016
info@mps-pps.it
www.mps-pps.it

TECHNICAL DATA

F2 150

WALL PROTECTION CLADDING STRIP

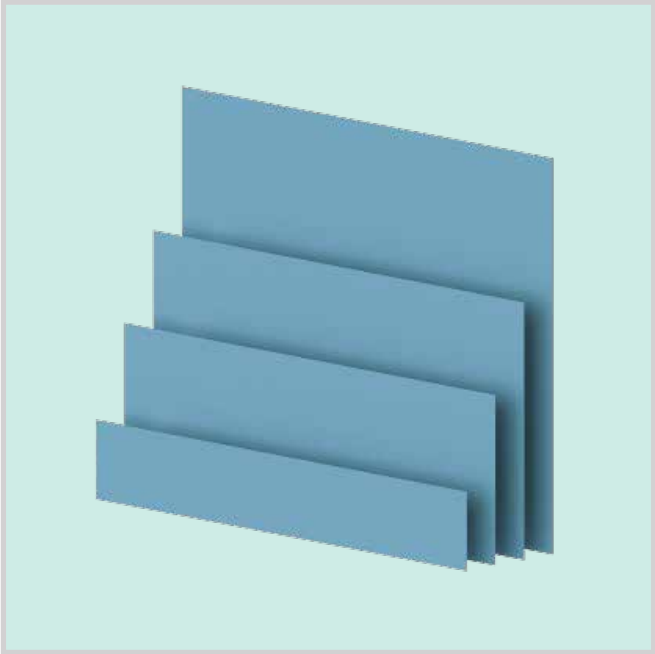

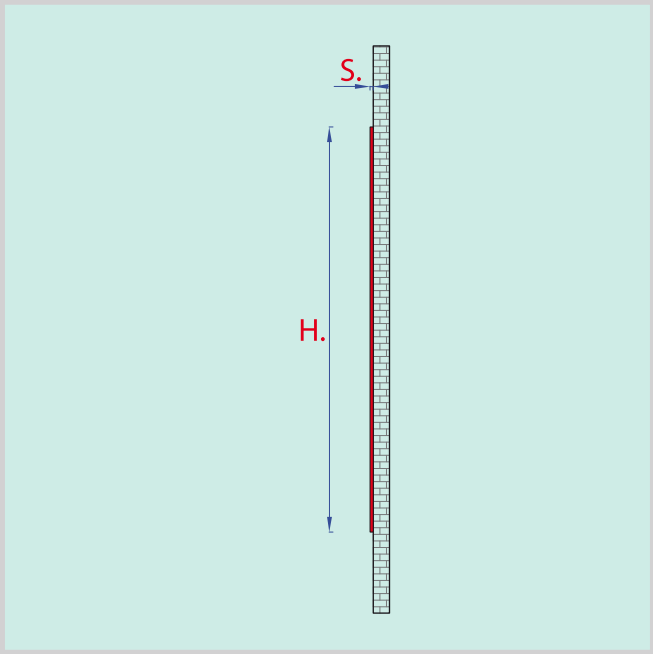

DESCRIPTION

Wall protection cladding strip, 147 mm high,
Made of **Titanium Dioxide** polymers, 2 mm thick.
"FINE" embossing for optimal hygiene.
Fire-retardant, anti-pollutant, antibacterial and odourless.
High resistance to impact, weathering and chemical agents.
To be fixed to the wall using suitable adhesives.

LOAD

Shock-resistance 300 kg.

SIZE

H. 147 mm . S. 1,5/2 mm. - strip of 3 lm. - multiples of 24 lm.

COLOR

S0 White - S1 Ivory- S2 Pastel blue - S3 Pastel green- S4 Light grey - S6 Yellow - S7 Blue - S8 Moss green - S9 Silver grey - S10 Brown - S12 Red - S14 Salmon - S16 Dove - S20 Apricot

CERTIFICATIONS

Certification of reaction to fire class B-s1,d0.
Certification certifying the absence of bacterial growth issued by CSI IMQ Group.
"Indoor Air Comfort GOLD" certification guaranteeing very low VOC emissions.
ISO 9001:2015 Quality Certification issued by TÜV Italia S.r.l.
Declaration from the Quality Office, certifying the non-use of Cadmium and/or heavy metals.
Declaration from the Quality Office, certifying biocompatibility and recyclability.


MPS reserves the right to modify prducts without previous advice.


Professional Protection Systems S.r.l.
Via Berlino, 17
24040 Verdellino (BG)
Italy
T.: +039 035 871895
F.: +039 035 870016
info@mps-pps.it
www.mps-pps.it

TECHNICAL DATA

F2 200

WALL PROTECTION CLADDING STRIP

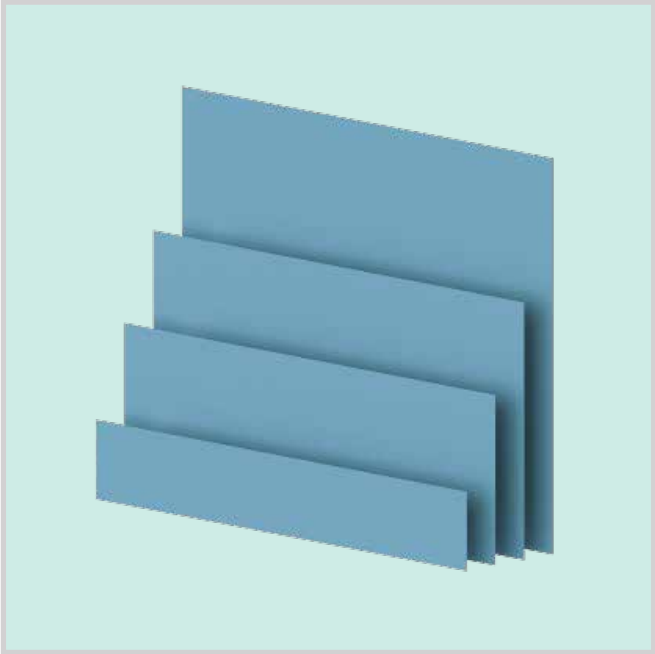

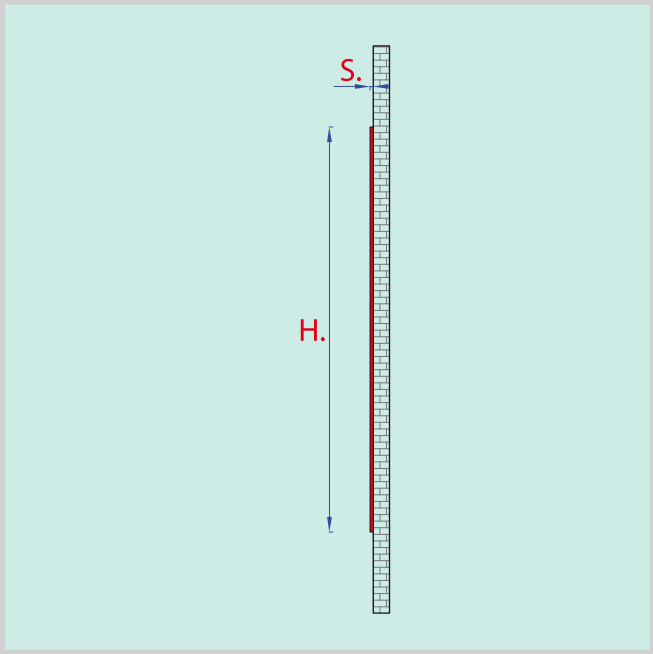

DESCRITION

Wall protection cladding strip, 197 mm high,
Made of **Titanium Dioxide** polymers, 2 mm thick.
"FINE" embossing for optimal hygiene.
Fire-retardant, anti-pollutant, antibacterial and odourless.
High resistance to impact, weathering and chemical agents.
To be fixed to the wall using suitable adhesives.

LOAD

Shock-resistance 300 kg.

SIZE

H. 197 mm . S. 1,5/2 mm. - strip of 3 lm - multiples of 18 lm.

COLOR

S0 White - S1 Ivory- S2 Pastel blue - S3 Pastel green- S4 Light grey - S6 Yellow -
S7 Blue - S8 Moss green - S9 Silver grey - S10 Brown - S12 Red - S14 Salmon -
S16 Dove - S20 Apricot

CERTIFICATIONS

Certification of reaction to fire class B-s1,d0.
Certification certifying the absence of bacterial growth issued by CSI IMQ Group.
"Indoor Air Comfort GOLD" certification guaranteeing very low VOC emissions.
ISO 9001:2015 Quality Certification issued by TÜV Italia S.r.l.
Declaration from the Quality Office, certifying the non-use of Cadmium and/or heavy metals.
Declaration from the Quality Office, certifying biocompatibility and recyclability.

MPS reserves the right to modify products without previous advice.

Professional
Protection
Systems S.r.l.

Via Berlino, 17
24040 Verdellino (BG)
Italy


T.: +039 035 871895
F.: +039 035 870016
info@mps-pps.it


www.mps-pps.it

TECHNICAL DATA

F2 250

WALL PROTECTION CLADDING STRIP

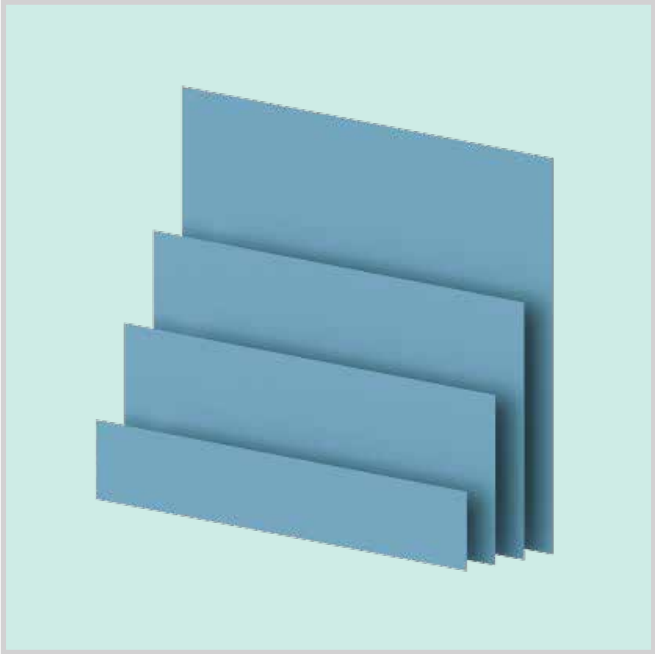

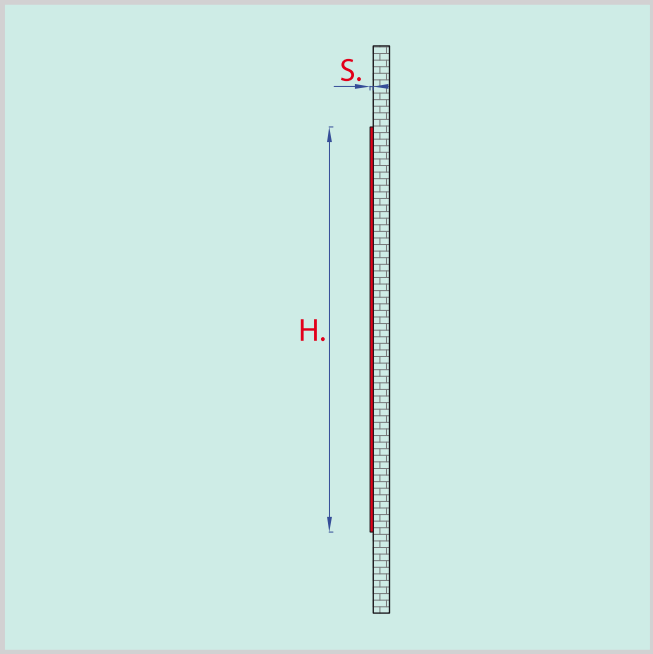

DESCRIPTION

Wall protection cladding strip, 247 mm high,
Made of **Titanium Dioxide** polymers, 2 mm thick.
"FINE" embossing for optimal hygiene.
Fire-retardant, anti-pollutant, antibacterial and odourless.
High resistance to impact, weathering and chemical agents.
To be fixed to the wall using suitable adhesives.

LOAD

Shock-resistance 300 kg.

MISURE

H. 247 mm . S. 1,5/2 mm. - strip of 3 lm - multiples of 15 lm.

COLOR

S0 White - S1 Ivory- S2 Pastel blue - S3 Pastel green- S4 Light grey - S6 Yellow - S7 Blue - S8 Moss green - S9 Silver grey - S10 Brown - S12 Red - S14 Salmon - S16 Dove - S20 Apricot

CERTIFICATIONS

Certification of reaction to fire class B-s1,d0.
Certification certifying the absence of bacterial growth issued by CSI IMQ Group.
"Indoor Air Comfort GOLD" certification guaranteeing very low VOC emissions.
ISO 9001:2015 Quality Certification issued by TÜV Italia S.r.l.
Declaration from the Quality Office, certifying the non-use of Cadmium and/or heavy metals.
Declaration from the Quality Office, certifying biocompatibility and recyclability.


MPS reserves the right to modify products without previous advice.


Professional Protection Systems S.r.l.
Via Berlino 17
24040 Verdellino (BG)
Italy
T.: +039 035 871895
F.: +039 035 870016
info@mps-pps.it
www.mps-pps.it

TECHNICAL DATA

F2 300

WALL PROTECTION CLADDING STRIP

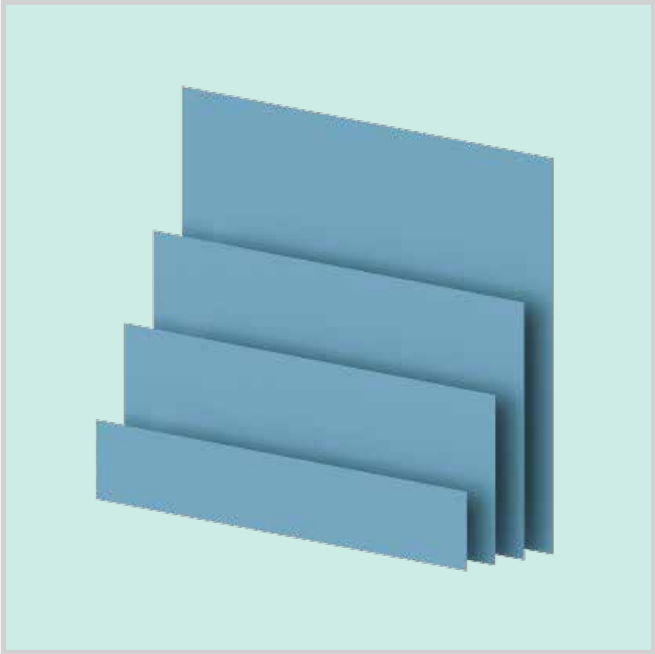

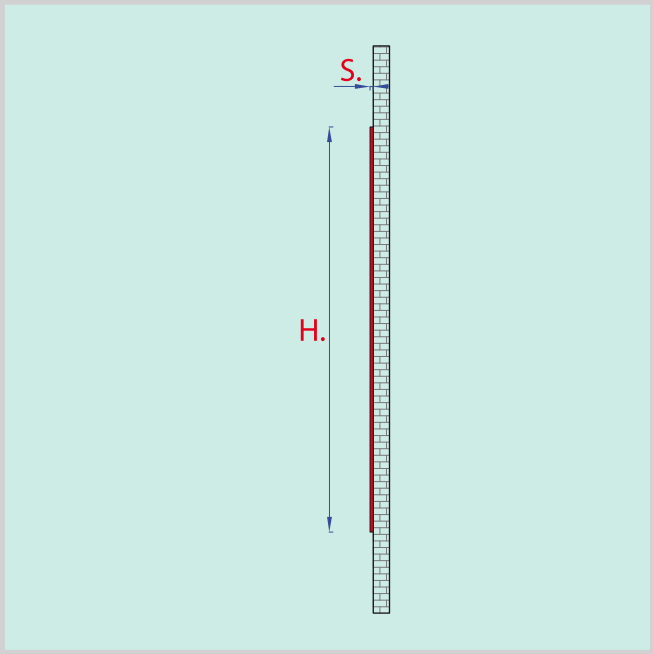

DESCRIPTION

Wall protection cladding strip, 297 mm high,
Made of **Titanium Dioxide** polymers, 2 mm thick.
"FINE" embossing for optimal hygiene.
Fire-retardant, anti-pollutant, antibacterial and odourless.
High resistance to impact, weathering and chemical agents.
To be fixed to the wall using suitable adhesives.

LOAD

Shock-resistance 300 kg.

SIZE

H. 297 mm . S. 1,5/2 mm. - strip of 3 lm - in multiples of 12 lm.

COLOR

S0 White - S1 Ivory- S2 Pastel blue - S3 Pastel green- S4 Light grey - S6 Yellow - S7 Blue - S8 Moss green - S9 Silver grey - S10 Brown - S12 Red - S14 Salmon - S16 Dove - S20 Apricot

CERTIFICATIONS

Certification of reaction to fire class B-s1,d0.
Certification certifying the absence of bacterial growth issued by CSI IMQ Group.
"Indoor Air Comfort GOLD" certification guaranteeing very low VOC emissions.
ISO 9001:2015 Quality Certification issued by TÜV Italia S.r.l.
Declaration from the Quality Office, certifying the non-use of Cadmium and/or heavy metals.
Declaration from the Quality Office, certifying biocompatibility and recyclability.


MPS reserves the right to modify products without previous advice.


Professional Protection Systems S.r.l.
Via Berlino, 17
24040 Verdellino (BG)
Italy
T.: +039 035 871895
F.: +039 035 870016
info@mps-pps.it
www.mps-pps.it

TECHNICAL DATA

F2 430

WALL PROTECTION CLADDING SHEET

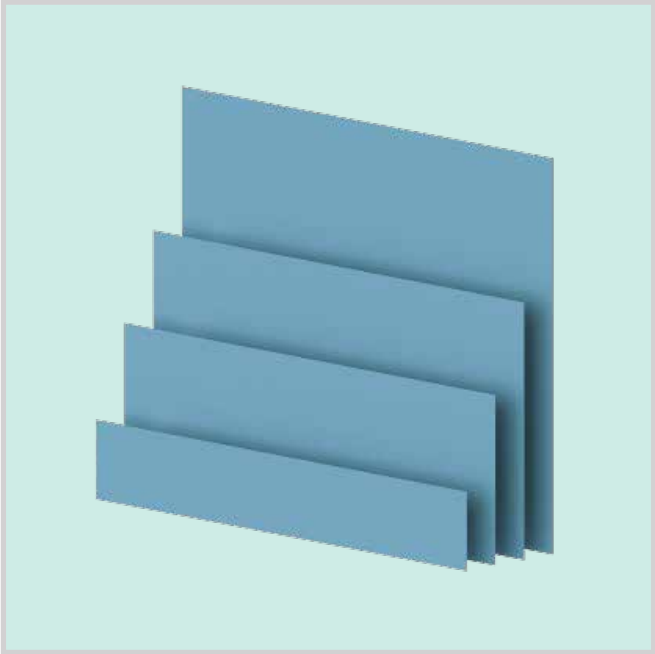

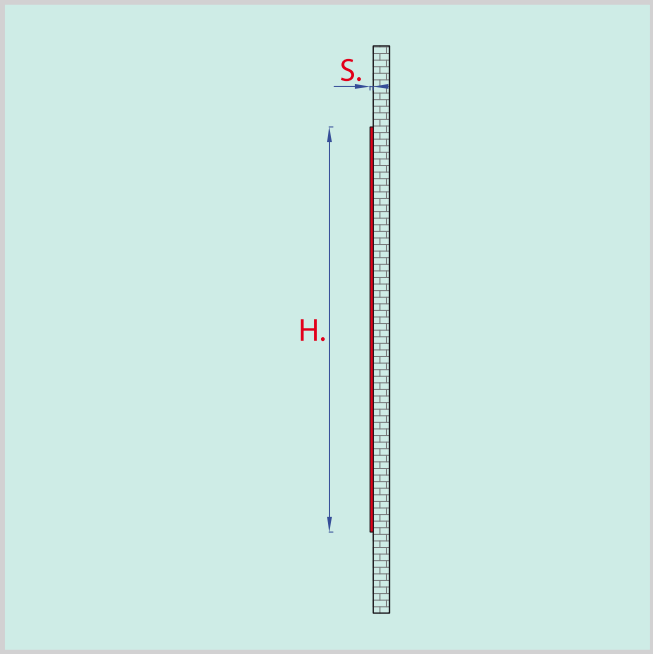

DESCRIPTION

Wall protection cladding strip, 427 mm high,
Made of **Titanium Dioxide** polymers, 2 mm thick.
"FINE" embossing for optimal hygiene.
Fire-retardant, anti-pollutant, antibacterial and odourless.
High resistance to impact, weathering and chemical agents.
To be fixed to the wall using suitable adhesives.

LOAD

Shock-resistance 300 kg.

SIZE

H. 427 mm . S. 1,5/2 mm. - sheets 3 lm. - multiples of 9 lm.

COLOR

S0 White - S1 Ivory- S2 Pastel blue - S3 Pastel green- S4 Light grey - S6 Yellow - S7 Blue - S8 Moss green - S9 Silver grey - S10 Brown - S12 Red - S14 Salmon - S16 Dove - S20 Apricot

CERTIFICATIONS

Certification of reaction to fire class B-s1,d0.
Certification certifying the absence of bacterial growth issued by CSI IMQ Group.
"Indoor Air Comfort GOLD" certification guaranteeing very low VOC emissions.
ISO 9001:2015 Quality Certification issued by TÜV Italia S.r.l.
Declaration from the Quality Office, certifying the non-use of Cadmium and/or heavy metals.
Declaration from the Quality Office, certifying biocompatibility and recyclability.


MPS reserves the right to modify products without previous advice.


Professional Protection Systems S.r.l.
Via Berlino, 17
24040 Verdellino (BG)
Italy
T.: +039 035 871895
F.: +039 035 870016
info@mps-pps.it
www.mps-pps.it

TECHNICAL DATA

F2 650

WALL PROTECTION CLADDING SHEET

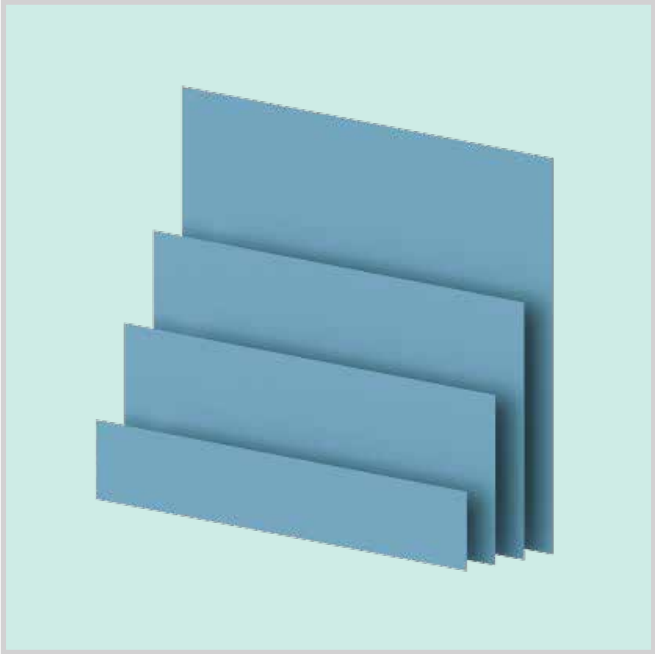

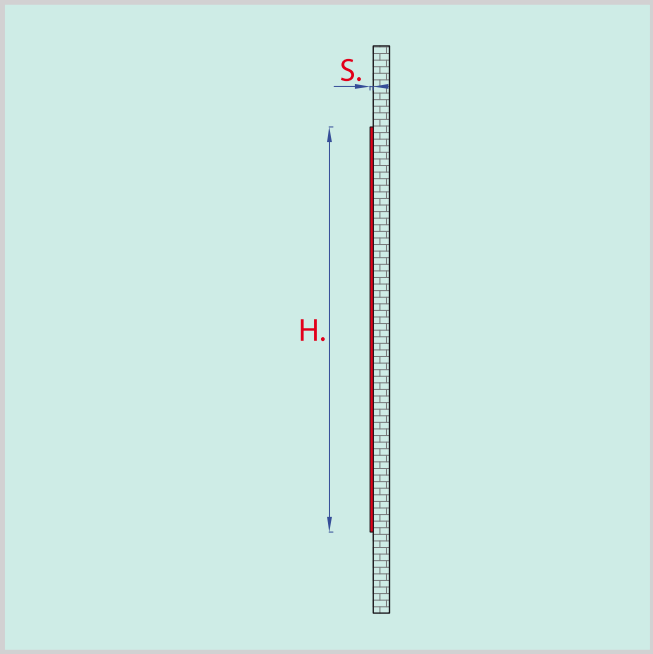

DESCRIPTION

Wall protection cladding strip, 647 mm high,
Made of **Titanium Dioxide** polymers, 2 mm thick.
"FINE" embossing for optimal hygiene.
Fire-retardant, anti-pollutant, antibacterial and odourless.
High resistance to impact, weathering and chemical agents.
To be fixed to the wall using suitable adhesives.

LOAD

Shock-resistance 300 kg.

SIZE

H. 647 mm . S. 1,5/2 mm. - sheets 3 lm. - multiples of 6 lm.

COLOR

S0 White - S1 Ivory- S2 Pastel blue - S3 Pastel green- S4 Light grey - S6 Yellow - S7 Blue - S8 Moss green - S9 Silver grey - S10 Brown - S12 Red - S14 Salmon - S16 Dove - S20 Apricot

CERTIFICAZIONI

Certification of reaction to fire class B-s1,d0.
Certification certifying the absence of bacterial growth issued by CSI IMQ Group.
"Indoor Air Comfort GOLD" certification guaranteeing very low VOC emissions.
ISO 9001:2015 Quality Certification issued by TÜV Italia S.r.l.
Declaration from the Quality Office, certifying the non-use of Cadmium and/or heavy metals.
Declaration from the Quality Office, certifying biocompatibility and recyclability.


MPS reserves the right to modify products without previous advice.


Professional Protection Systems S.r.l.
Via Berlino, 17
24040 Verdellino (BG)
Italy
T.: +039 035 871895
F.: +039 035 870016
info@mps-pps.it
www.mps-pps.it

TECHNICAL DATA

F2 1000

WALL PROTECTION CLADDING SHEET

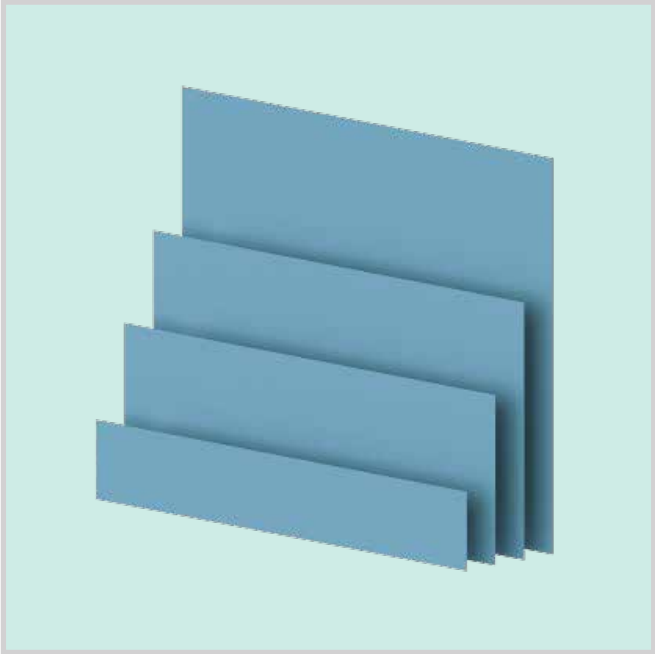

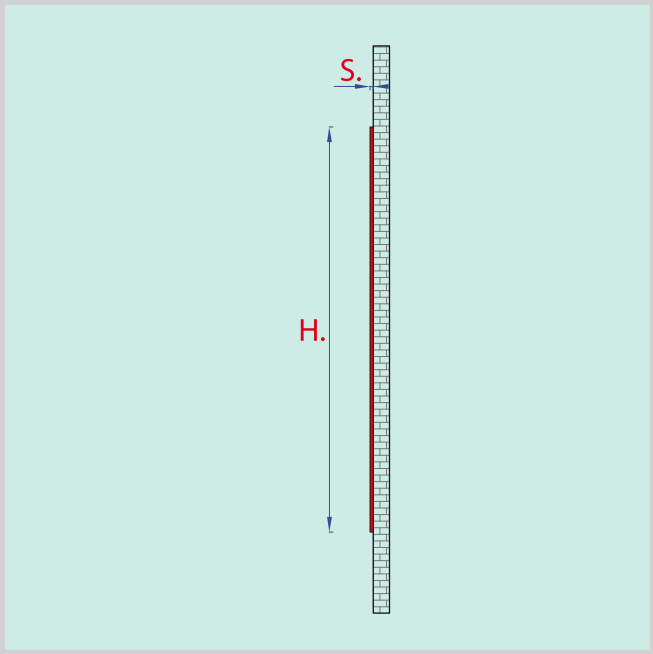

DESCRIPTION

Wall protection cladding strip, 997 mm high,
Made of **Titanium Dioxide** polymers, 2 mm thick.
"FINE" embossing for optimal hygiene.
Fire-retardant, anti-pollutant, antibacterial and odourless.
High resistance to impact, weathering and chemical agents.
To be fixed to the wall using suitable adhesives.

LOAD

Shock-resistance 300 kg.

SIZE

H. 997 mm . S. 1,5/2 mm. - sheets 1,3 lm. - multiples of 3,9 lm.

COLOR

S0 White - S1 Ivory- S2 Pastel blue - S3 Pastel green- S4 Light grey - S6 Yellow - S7 Blue - S8 Moss green - S9 Silver grey - S10 Brown - S12 Red - S14 Salmon - S16 Dove - S20 Apricot

CERTIFICATIONS

Certification of reaction to fire class B-s1,d0.
Certification certifying the absence of bacterial growth issued by CSI IMQ Group.
"Indoor Air Comfort GOLD" certification guaranteeing very low VOC emissions.
ISO 9001:2015 Quality Certification issued by TÜV Italia S.r.l.
Declaration from the Quality Office, certifying the non-use of Cadmium and/or heavy metals.
Declaration from the Quality Office, certifying biocompatibility and recyclability.


MPS reserves the right to modify products without previous advice.


Professional Protection Systems S.r.l.
Via Berlino, 17
24040 Verdellino (BG)
Italy
T.: +039 035 871895
F.: +039 035 870016
info@mps-pps.it
www.mps-pps.it

TECHNICAL DATA

F2 1100

WALL PROTECTION CLADDING SHEET

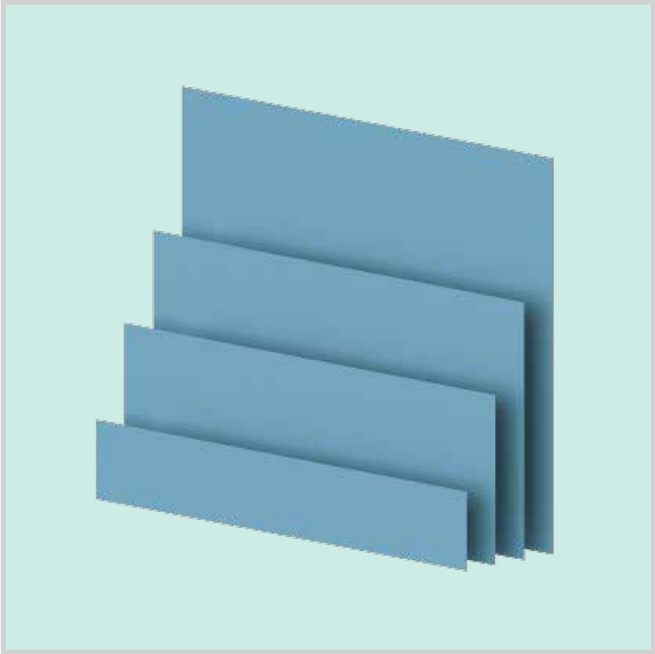

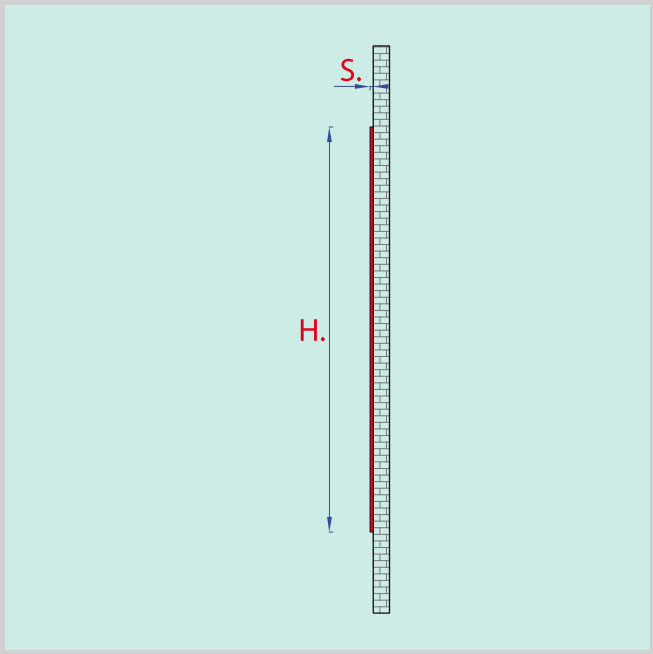

DESCRIPTION

Wall protection cladding strip, 1100 mm high,
Made of **Titanium Dioxide** polymers, 2 mm thick.
"FINE" embossing for optimal hygiene.
Fire-retardant, anti-pollutant, antibacterial and odourless.
High resistance to impact, weathering and chemical agents.
To be fixed to the wall using suitable adhesives.

LOAD

Shock-resistance 300 kg.

SIZE

H. 1100 mm . S. 1,5/2 mm. - sheets 1,3 lm. - multiples of 3 lm.

COLOR

S0 White - S1 Ivory- S2 Pastel blue - S3 Pastel green- S4 Light grey - S6 Yellow - S7 Blue - S8 Moss green - S9 Silver grey - S10 Brown - S12 Red - S14 Salmon - S16 Dove - S20 Apricot

CERTIFICATIONS

Certification of reaction to fire class B-s1,d0.
Certification certifying the absence of bacterial growth issued by CSI IMQ Group.
"Indoor Air Comfort GOLD" certification guaranteeing very low VOC emissions.
ISO 9001:2015 Quality Certification issued by TÜV Italia S.r.l.
Declaration from the Quality Office, certifying the non-use of Cadmium and/or heavy metals.
Declaration from the Quality Office, certifying biocompatibility and recyclability.


MPS reserves the right to modify products without previous advice.


MPS Professional Protection Systems S.r.l.
Via Berlino, 17
24040 Verdellino (BG)
Italy
T.: +039 035 871895
F.: +039 035 870016
info@mps-pps.it
www.mps-pps.it

TECHNICAL DATA

F2 1300

WALL PROTECTION CLADDING SHEET

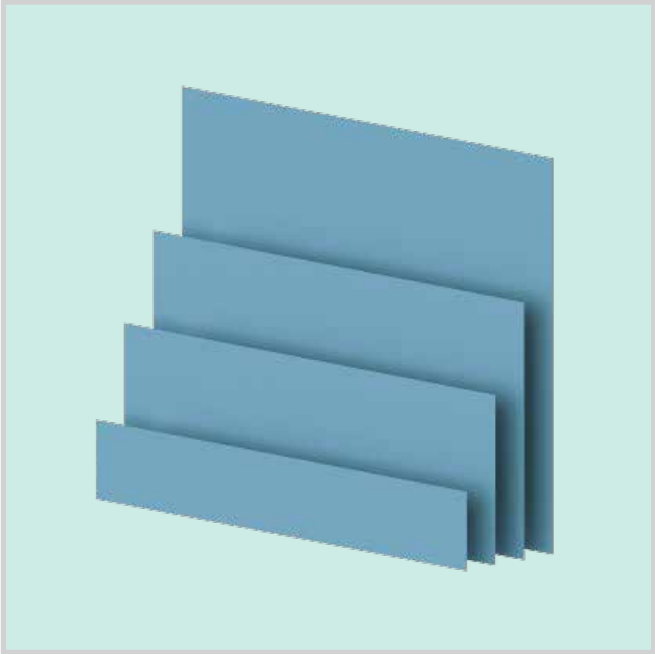

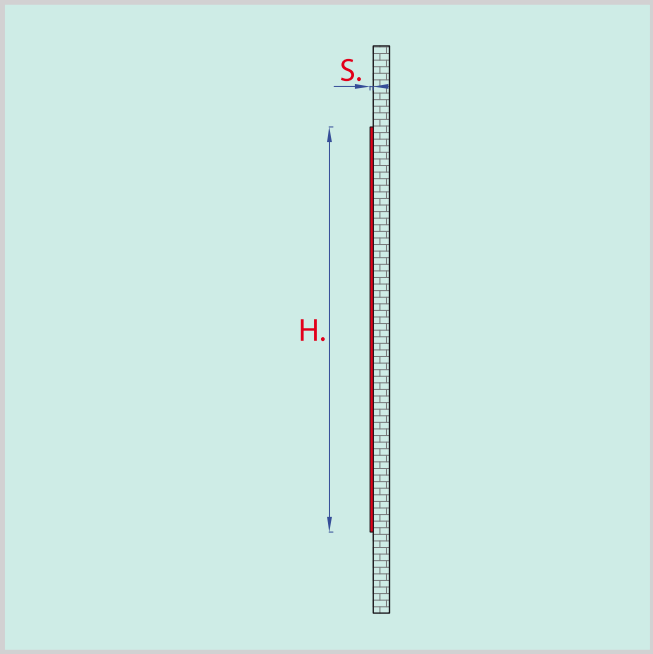

DESCRPTION

Wall protection cladding strip, 1300 mm high,
Made of **Titanium Dioxide** polymers, 2 mm thick.
"FINE" embossing for optimal hygiene.
Fire-retardant, anti-pollutant, antibacterial and odourless.
High resistance to impact, weathering and chemical agents.
To be fixed to the wall using suitable adhesives.

LOAD

Shock-resistance 300 kg.

SIZE

H. 1300 mm. - S. 1,5/2 mm. - strip of 3 lm - in multiples of 3 lm.

COLOR

S0 White - S1 Ivory- S2 Pastel blue - S3 Pastel green- S4 Light grey - S6 Yellow - S7 Blue - S8 Moss green - S9 Silver grey - S10 Brown - S12 Red - S14 Salmon - S16 Dove - S20 Apricot

CERTIFICATIONS

Certification of reaction to fire class B-s1,d0.
Certification certifying the absence of bacterial growth issued by CSI IMQ Group.
"Indoor Air Comfort GOLD" certification guaranteeing very low VOC emissions.
ISO 9001:2015 Quality Certification issued by TÜV Italia S.r.l.
Declaration from the Quality Office, certifying the non-use of Cadmium and/or heavy metals.
Declaration from the Quality Office, certifying biocompatibility and recyclability.

MPS reserves the right to modify products without previous advice.

Professional Protection Systems S.r.l.
Via Berlino, 17
24040 Verdellino (BG)
Italy
T.: +039 035 871895
F.: +039 035 870016
info@mps-pps.it
www.mps-pps.it

MPS COLOR RANGE

F2 SERIE

	Color	MPS Reference	RAL Reference
	White	S0	9010
	Ivory	S1	1015
	Pastel Blue	S2	5024
	Pastel Green	S3	6019
	Light Grey	S4	7035
	Yellow	S6	1021
	Blue	S7	5001
	Moss Green	S8	6005
	Silver Grey	S9	7001
	Brown	S10	8025
	Red	S12	3003
	Salmon	S14	3022
	Dove	S16	
	Apricot	S20	1034

The ral colors references in the a.m. table are indicative and not binding as a plastic material and are subject to variation of 0.5%
They can be modified at any time for production reasons and market needs

The representation of the reported RAL colors is to be considered approximate, caused by the difference of the representation on the screen.
For an exact re-production of colors we suggest to refer to an original RAL color chart

MPS Professional Protection Systems S.r.l.
Via Berlino, 17
24040 Verdellino (BG)
Italy
T.: +039 035 871895
F.: +039 035 870016
info@mps-pps.it
www.mps-pps.it