
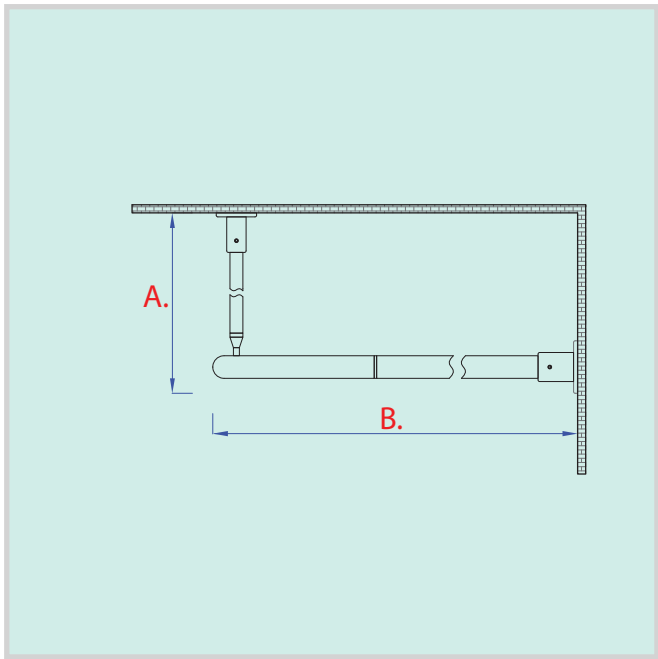



TT0028CC

FIXED STRUCTURE FOR MODULAR CURTAINS

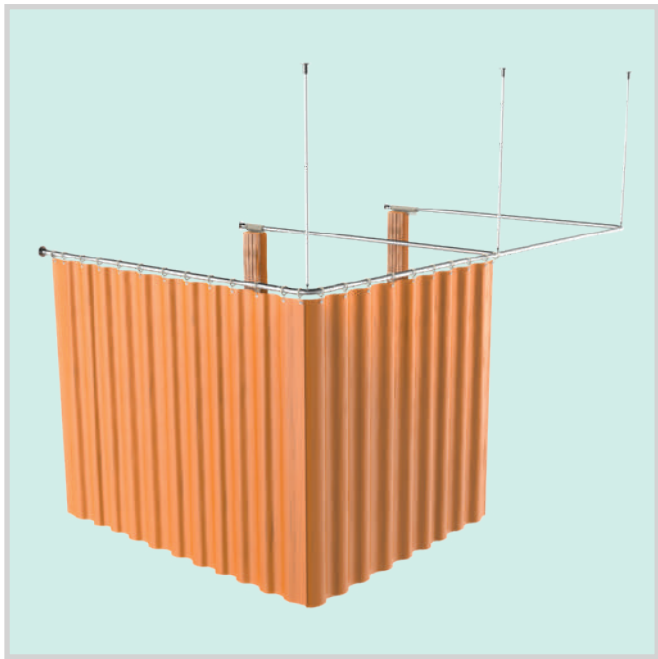

DESCRIPTION	<div> <div>  </div> <div> <p>Modular fixed structure in high resistance anti-dust smooth anodized aluminum.</p> <p>Anodized aluminum tube Ø 28 mm. bars of 6 Mtl.</p> <p>Anodized aluminum tube Ø 16 mm. bars of 6 Mtl.</p> <p>Aluminum wall support Ø 28 mm. with three fixing points.</p> <p>Aluminum ceiling support Ø 16 mm. with three fixing points.</p> <p>Aluminum tip Ø 16 mm.</p> <p>Nylon Ø 28 mm threaded joint.</p> <p>Nylon Ø 28 mm unthreaded joint.</p> <p>Anodized aluminim Ø 28 mm. bent threaded in ther middle.</p> <p>"T" Ø 28 mm junction support.</p> <p>Nylon Ø 28 mm ring stop.</p> <p>Rings with diam 5 cm. made of Nylon with anti-strangling safety release system.</p> <p>Trevira®CS- Bioactive antibacterial class 1 fire-reaction washable material up to 95 ° with thick dustproof and anti-slip texture, measure height 175 x second length structure cm.</p> </div> </div>
SIZE	A tailor made cm. - B tailor made cm.
COLOR	White - Ivory - Yellow - Orange - Green - Light blue – Blue
CERTIFICATIONS	<p>ISO 9001:2015 quality certification issued by TÜV Italia S.r.l.</p> <p>“Class 1” fire safe certification issued by the Italian Ministry.</p>

MPS reserves the right to modify products without previous advice.

## TREVIRA®CS BIOACTIVE FABRIC CURTAIN



### WASHINGS



Wash max  
90° - 95° C



Bleachable



Low temperature



Dry cleanable  
with perchloroethylene

### CHARACTERISTICS



Dense  
weave



Permanent  
flame retardant



Bioactive



Hypoallergenic



Permanent  
antibacterial



Breathable



Waterproof



Anti-crease



Anti-dust



Antimicrobial



High UV  
stability

MPS reserves the right to make any changes deemed necessary to improve the products without prior notice.

## APT

### ANELLO PER TENDA



#### DESCRIPTION

Ring is made of high quality nylon, resistant to deformation and breakage.  
With double safety release system to prevent the risk of strangulation in the event of an accident or accidental hooking.

#### MEASURES

External 50 mm. - Internal 36 mm.

#### COLOR

Pearly white

#### CERTIFICATIONS

Certificazione Qualità ISO 9001:2015 rilasciata dal TÜV Italia S.r.l.

MPS reserves the right to make any changes deemed necessary to improve the products without prior notice.