
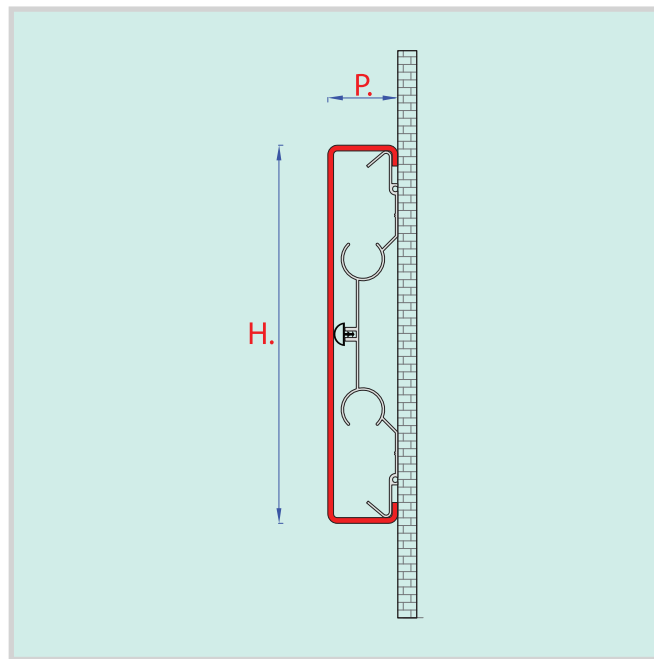


P200L

HEAVY SHOCK-ABSORBING BUMPER RAIL

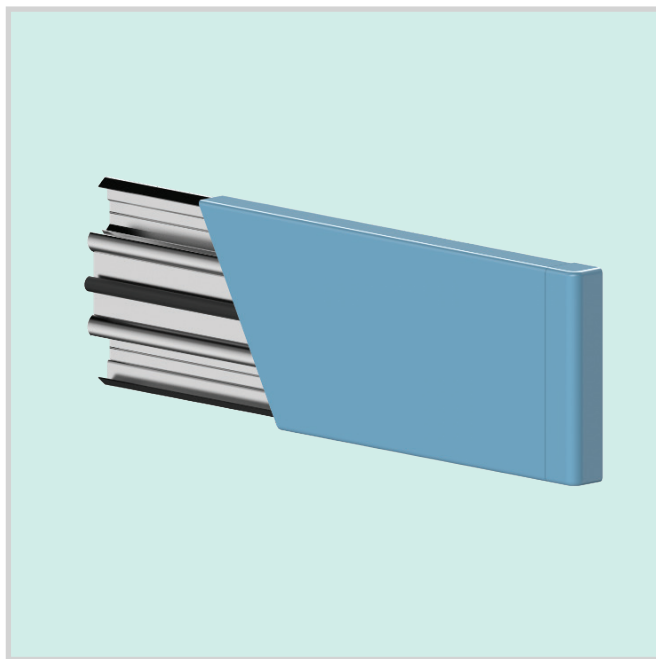

DESCRIPTION

Shock-absorbing Bumper Rail, with height of 200 mm.
 Heavy aluminum profile.
 Covered in **Titanium Dioxide** polymer, 3 mm thickness.
 "FINE" embossing for a perfect hygiene.
 Fire-retardant, anti-pollutant, antibacterial, and odorless.
 High resistance to impacts and to atmospheric and chemical agents.
 Self centering closing end caps made.
 Snap-fitted onto an aluminum load-bearing profile.
 To be fixed to the wall by means of the included screws and plugs.

LOAD

Shock-resistance 400 kg.

SIZE

H. 200 mm. - P. 37 mm. - In 5 lm bars.

COLOR

S0 White - S1 Ivory- S2 Pastel blue - S3 Pastel green- S4 Light grey - S5 Anthracite grey
 S6 Yellow- S7 Blue - S8 Moss green - S9 Silver grey - S10 Brown - S11 Black - S12 Red -
 S13 Wild Rose - S14 Salmon

CERTIFICATIONS

Certification of reaction to fire class B-s2,d0.
 Certification certifying the absence of bacterial growth issued by CSI IMQ Group.
 "Indoor Air Comfort GOLD" certification guaranteeing very low VOC emissions.
 ISO 9001:2015 Quality Certification issued by TÜV Italia S.r.l.
 Declaration from the Quality Office, certifying the non-use of Cadmium and/or heavy metals.
 Declaration from the Quality Office, certifying biocompatibility and recyclability.

MPS reserves the right to modify products without previous advice.