
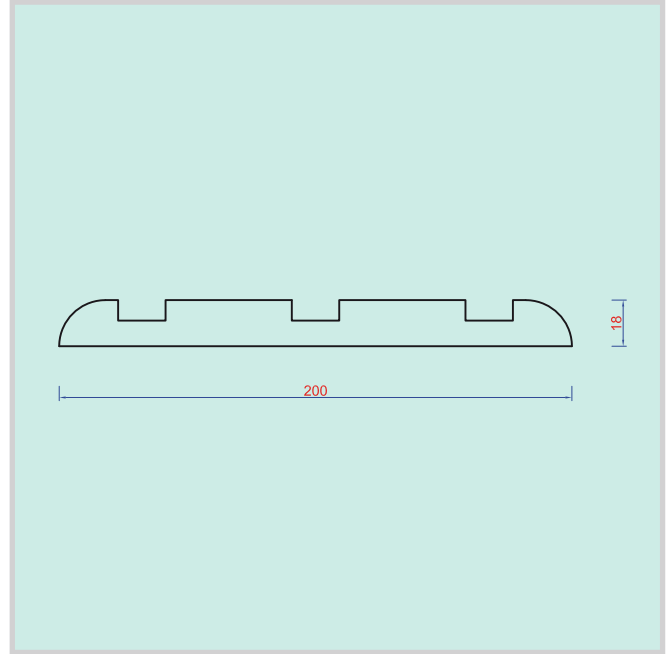


DATA SHEET

PG20018

RUBBER BUMPER

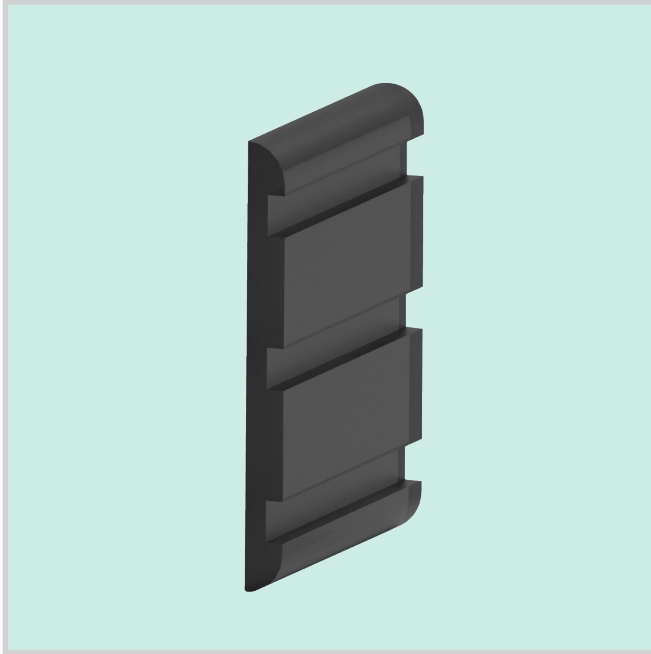

DESCRIPTION

Full NEOPRENE rubber bumper.
Provides long-lasting impact protection for both indoor and outdoor installation.
Fixed with dowels and screws in the appropriate channels.

CHARACTERISTICS

Self-extinguishing.
Good mechanical resistance 20 - 25 MPa.
Good resistance to oils at low temperatures and acceptable at high temperatures.
Good resistance to oxygen and aging.
Fair resistance to acids.
Flame resistance due to the presence of halides.
Excellent resistance to sea water, salts, bases and diluted acids.
Good mechanical properties.
Excellent resistance to abrasion, tearing and fatigue.
Excellent resistance to UV radiation.
High impermeability to gases.

RANGE

Impact resistance 1000 kg.

MEASURES

200 x 18mm. - in 2 m bars.

COLOR

Black

CERTIFICATIONS

ISO 9001:2015 Quality Certification issued by TÜV Italia S.r.l.

MPS reserves the right to make any changes deemed necessary to improve the products without prior notice.