
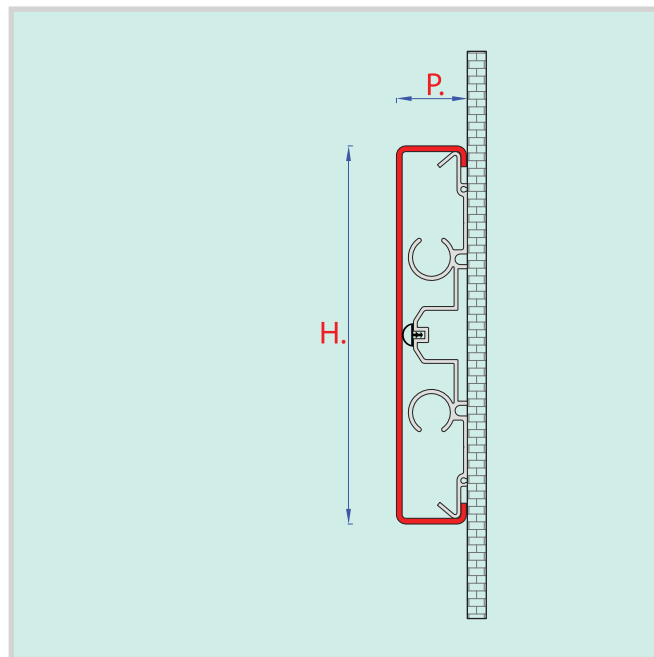


P200N

HIGH HOLD SHOCK-ABSORBING BUFFER

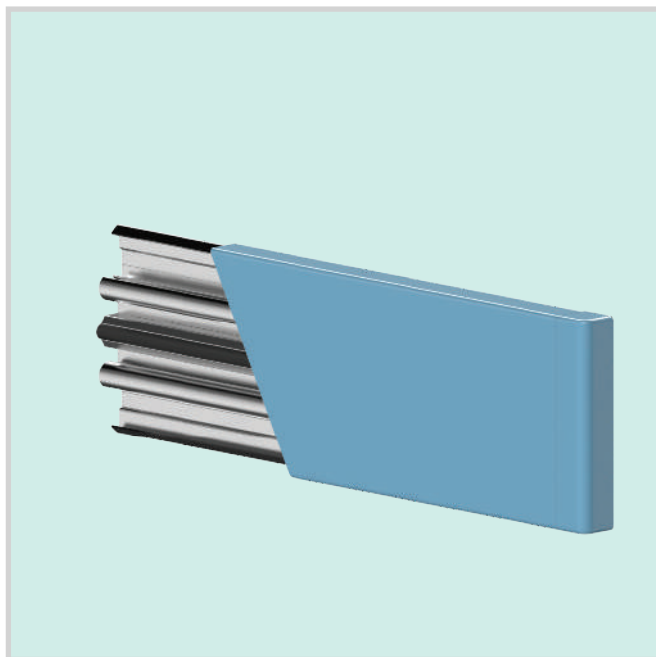

DESCRIPTION

Shock-absorbing buffer height 200 mm.
 High hold heavy aluminum profile.
 Cover made of titanium dioxide polymer th. 3 mm.
 "FINE" embossing for a perfect hygiene.
 Anti pollution, anti bacterial, odorless.
 High shock-resistance and weather chemicals resistance.
 Self centering closing end caps and brackets made of nylon V0.
 Fixed on main aluminum profile.
 Wall fixing through delivered screws and wall plugs.

LOAD

Shock-resistance 300 kg.

SIZE

H. 200 mm. - th. 37 mm. - bars of 5 mtl.

COLOR

S0 White - S1 Ivory- S2 Pastel blue - S3 Pastel green- S4 Light grey - S5 Anthracite grey
 S6 Yellow- S7 Blue - S8 Moos green - S9 Silver grey - S10 Pale brown - S11 Traffic black -
 S12 Red -S13 Wild Rose - S14 Salmon

CERTIFICATIONS

ISO 9001:2015 quality certification issued by TÜV Italia S.r.l.
 Fire reaction class certification B-s2,d0.
 Absence of bacterial growth certification issued by CSI group IMQ.
 Declaration of quality office about absence of Cadmium and/or heavy metals.
 Declaration of quality office about bio-compatibility and recycling.

MPS reserves the right to modify products without previous advice.

MPS COLOR RANGE

P200N

	Color	MPS Reference	RAL Reference
	White	S0	9010
	Ivory	S1	1015
	Pastel blu	S2	5024
	Pastel green	S3	6019
	Light grey	S4	7035
	Anthracite grey	S5	7016
	Yellow	S6	1021
	Blue	S7	5001
	Moss green	S8	6005
	Silver grey	S9	7001
	Pale brown	S10	8025
	Traffic black (*if order)	S11	9017
	Red	S12	3003
	Wild Rose	S13	
	Salmon	S14	3022

The ral colors references in the a.m. table are indicative and not binding as a plastic material and are subject to variation of 0.5%
They can be modified at any time for production reasons and market needs

The representation of the reported RAL colors is to be considered approximate, caused by the difference of the representation on the screen.
For an exact re-production of colors we suggest to refer to an original RAL color chart